

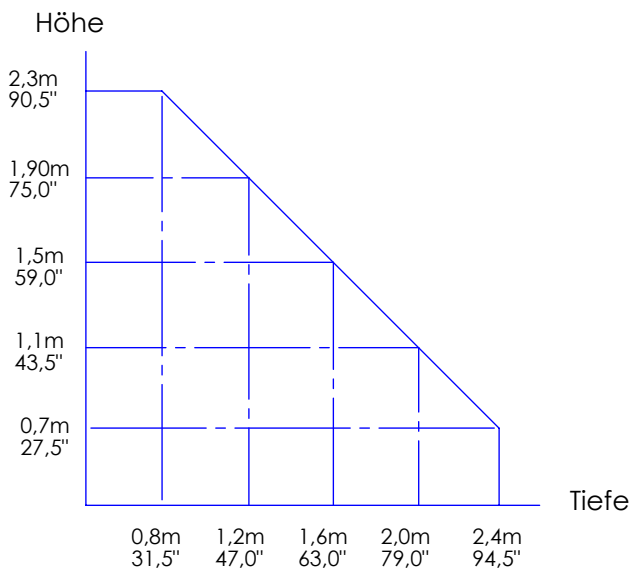
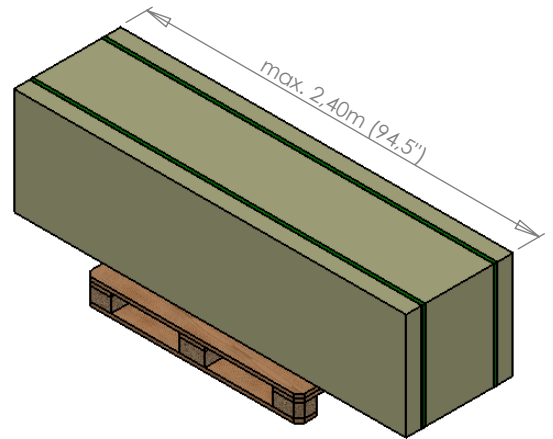


# Maximale Palettenabmessungen die mit ErgoPack umreift werden können

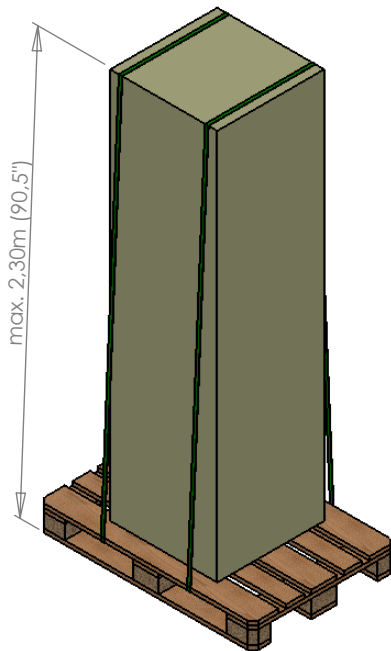

Palettentiefe	Palettenhöhe
0,8m (31,5")	2,3m (90,5")
1,0m (39,5")	2,10m (82,5")
1,2m (47,0")	1,9m (75,0")
1,4m (55,0")	1,7m (67,0")
1,6m (63,0")	1,5m (59,0")
1,8m (71,0")	1,3m (51,0")
2,0m (79,0")	1,1m (43,5")
2,4m (94,5")	0,7m (27,5")

## Mindestabmessungen für den "Standard" Umlenkschlitten

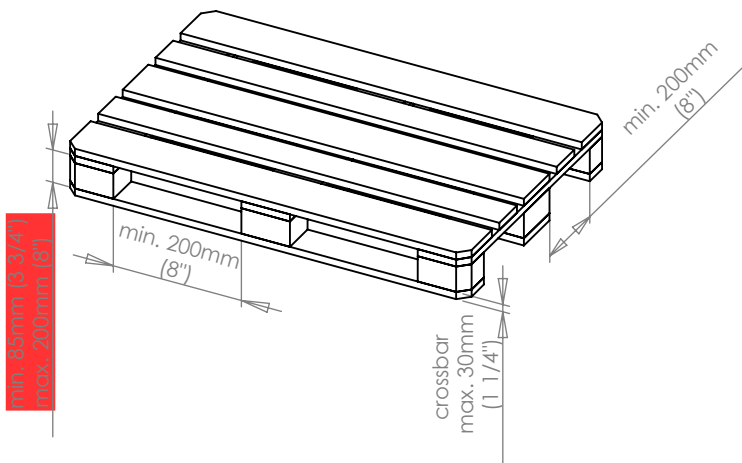

## Mindestabmessungen für den "US-Umlenkschlitten"

